
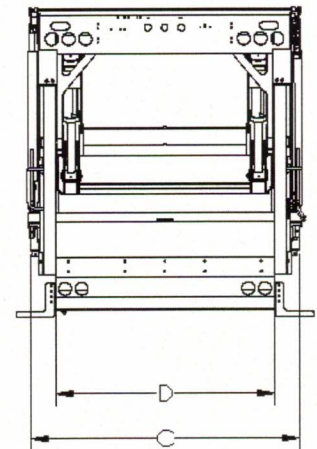


BODY SPECIFICATIONS

Body Capacity	16yd ³	20yd ³
A. Body Length	206"	234"
B. Height Of Body Above Chassis	87"	87"
C. Body Width	96"	96"
D. Hopper Opening Width	74"	74"
E. Loading Sill Below Chassis Frame	2"	2"
F. Height Of Tailgate Above Chassis Frame (Tailgate Raised)	159"	159"
G. Length Of Body (Tailgate Raised)	245"	273"
Hopper Capacity	2.5yd ³	2.5yd ³
Dynamic Hopper Capacity (yd ³ /minute)	10yd ³	10yd ³
Approximate Body Weight	10,100 LBS.	10,650 LBS.

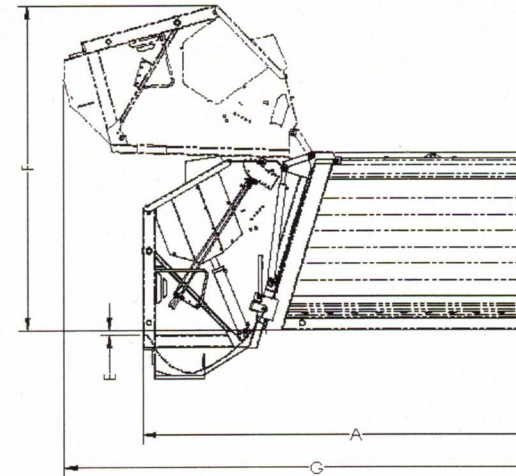

MINIMUM CHASSIS REQUIREMENTS

Minimum GVWR	33,000 LBS.	33,000 LBS.
Front Axle	12,000 LBS.	12,000 LBS.
Rear Axle	21,000 LBS.	21,000 LBS.
Cab to Axle	117"	145"
Chassis Frame Height	36" - 39"	36" - 39" 210"

Body Construction

- Body Sides: 10 Gauge GR80
- Body Roof: 10 Gauge GR80
- Body Floor: 10 Gauge GR80
- Ejection Panel: 10 Gauge GR80
- Sweep Face: 3/16 GR100
- Tailgate Side Wall: 7 Gauge GR50
- Tailgate Floor: 3/16 AR400

Features

- High Strength Curved Shell Body
- Patented Packing Mechanism
- Rear Fenders Standard
- Curved Floor Provides Liquid Sump
- Low Body Height
- Easy to Maintain
- Pack Cycle Time of 15 Seconds

Hydraulics

- Oil Reservoir: 36 Gal.
- Oil Flow w/ Standard Pump: 36 GPM
- Operating Pressure: 2,500 PSI Tailgate, 3,000 PSI Body
- Engine RPM: 1,300 RPM
- Hose Burst Ratio: 4 to 1
- Return Filter: 10 Micron
- Pack Cylinders: 4.5"
- Sweep Cylinders: 4.5"
- Eject Cylinder: 5", 2 stage telescopic
- Tailgate Lift: 3"

Optional Features

- Container Roll Bar with Lip-and-Latch
- Container Lip-And-Latch w/ 8,000 LBS. Drum Winch
- Single & Dual Tipper(s)
- Cart Tipper Tap-In-Kits
- Work Lights
- Strobe Lights
- LED Stop, Tail, Turn, Reverse
- Broom and Shovel Holder
- Rear View Color Camera

